

# GEMIN

SHOEBOX LIGHTING



○

## ETL listed Shoebox Lighting GEMIN

Applications :

- Parking Lot.
- Shopping Centers.
- Residential Areas.
- All-Area/Flood Applications.

LED Driver:

Universal Input Voltage 120-277 Vac  
50/60 Hz.

Optional Input Voltage 249-528 Vac  
50/60 Hz.


A line to Earth 10KV Surge Protection.  
IP67 Rated LED Driver.

Power Factor > 0.90.

THD < 20%.

CRI > 70.

CCT : 4000K/5000K.

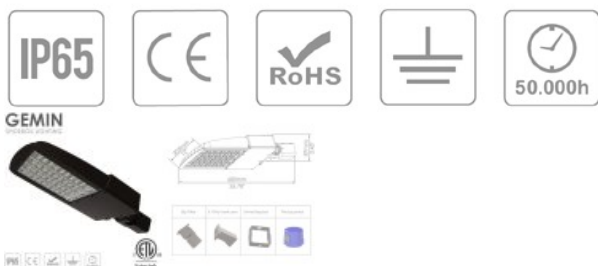

---

Category: ETL Listed Lighting

---

### Description

## Description

## ETL listed Shoebox Lighting GEMIN Features:

ETL listed Shoebox Lighting GEMIN Surface oxidation of aluminum profile, High-Pressure Die-Cast, Powder Coated Aluminum driver box.

Polycarbonate optical lens: Type III medium.

Slip Fitter standard, Mounting Arms or swivel pendant for optional.

Long-life, high-efficiency surface mounting LEDs.

We have integrated Motion Sensor for optional.

L70>50,000 Hours Rated Lifespan.

5-year Warranty.

Ambient Temperature -35 to 40 °C.

Fixture Protection Class IP65.

ETL Wet Location Listed.

## ETL listed Shoebox Lighting GEMIN Specifications:

Luminaire Efficacy: 135-145 LM/W.

CCT: 3500K/4000K/5000K/5500K.

GEMIN 100: Input Wattage 100W, Input Voltage 120-277V, LED module: 2,  
Delivered Lumens : 14500LM.

GEMIN 150: Input Wattage 150W, Input Voltage 120-277V, LED module: 3,  
Delivered Lumens : 21750LM.

GEMIN 200: Input Wattage 200W, Input Voltage 120-277V, LED module: 4,  
Delivered Lumens : 29000LM.

GEMIN 250: Input Wattage 250W, Input Voltage 120-277V, LED module: 4,  
Delivered Lumens : 33750LM.

## GEMIN Shipping Data:

GEMIN 100: Net Weight is 7.8 KG. Package: 63\*35\*15CM/1 pcs.

GEMIN 150: Net Weight is 7.9 KG. Package: 63\*35\*15CM/1 pcs.

GEMIN 200: Net Weight is 8.3 KG. Package: 63\*35\*15CM/1 pcs.

GEMIN 250: Net Weight is 8.3 KG. Package: 63\*35\*15CM/1 pcs.

## ETL listed Shoebox Lighting GEMIN Parts option:

Slip Fitter / 6" Kitty Hawk Arm / Swivel Bracket / Photocontrol.

## GEMIN-A-B-C-D-E-F

A: Wattage: 100=100W, 150=150W, 200=200W, 250=250W.

B: Color temperature : 35K=3500K, 40K=4000K, 50K=5000K, 55K=5500K.

C: Driver: 08=EUK-096S210DT, 17=EUK-150S350DT, 18=EUK-200S560DT, 19=EUK-

240S670DT, 30=ESC-150S210DT, 31=ESC-150S210ST, 34=ESC-150S280DT, 35=ESC-150S280ST, 36=ESD-240S460DT, 37=ESD-240S660DT.

D: Chip: L5=LUXEON 5050.

E: Coating color: DB=Dark Bronze. (custom color code).

F: Mounting: SF=Slip Fitter, BR=Swivel Bracket, KA=Kitty Hawk Arm.

## Related products

**TAURU**  
SPORTS LIGHTER



ETL Listed Sports Lighter TAURU

## Contact Information

**ZHEJIANG APPDY INDUSTRY CO., LIMITED.**

Yinzhou, Ningbo, Zhejiang China.

+86-574-2881-0298

export@cissr.com

**We aim to reply within 24 hours.**